


HOT AIR GUN

RANG OF APPLICATION

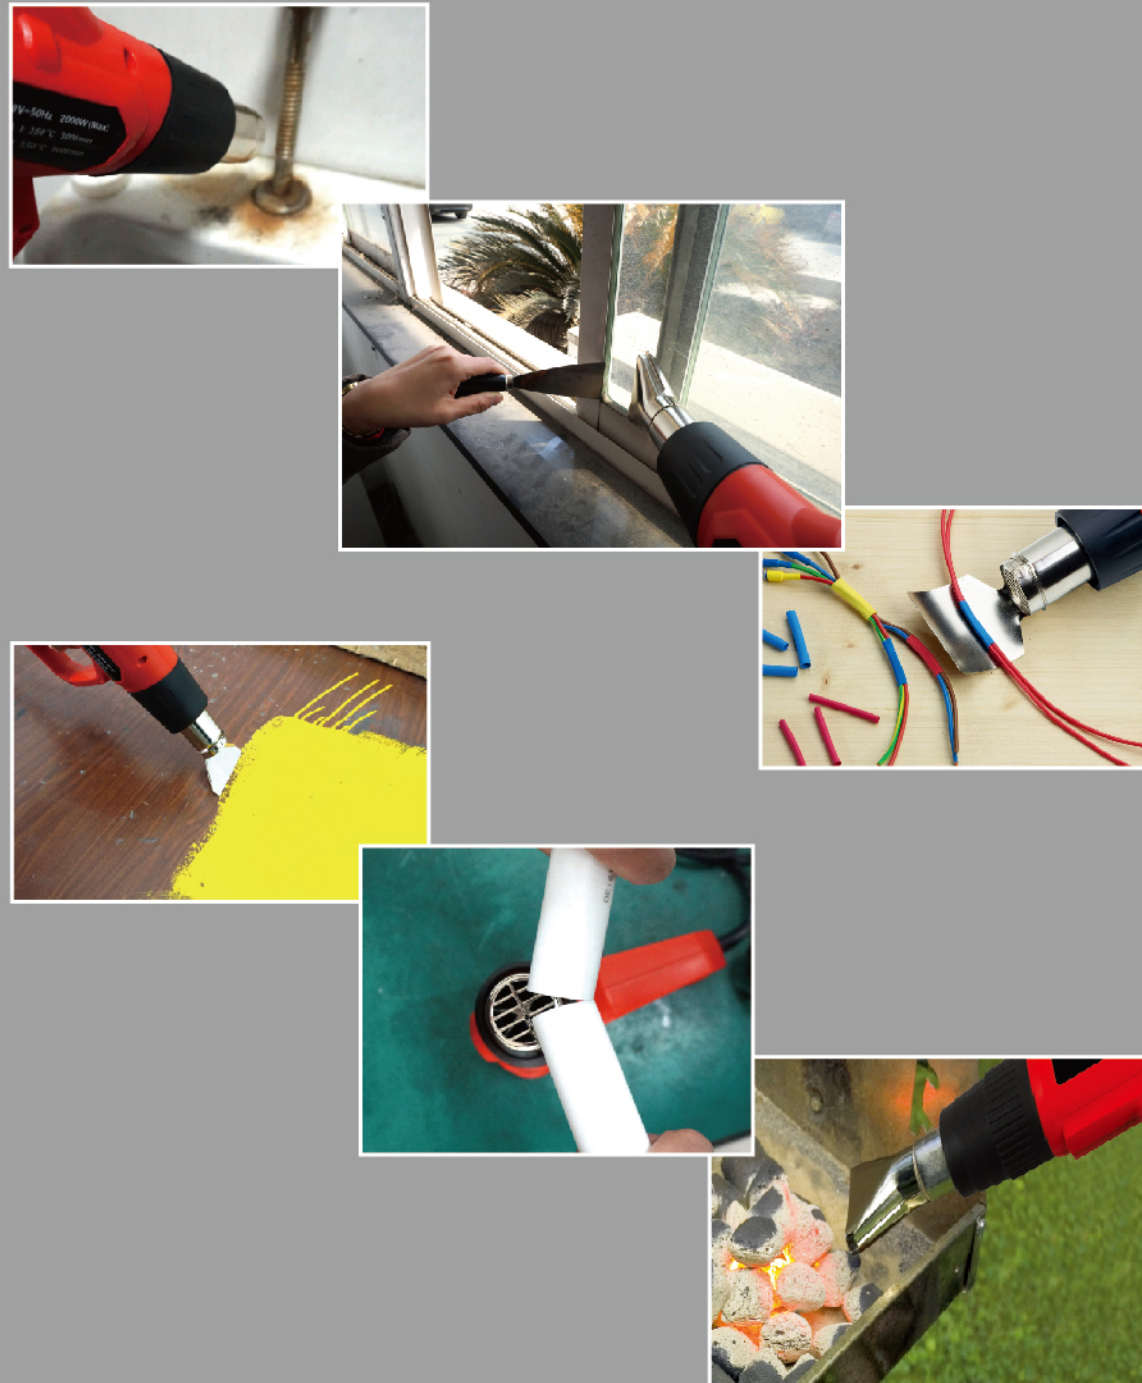

HOT AIR GUN

GW1001

Voltage & Frequency	230/240V~50Hz	230/240V~50Hz	120V~60Hz
Rate Power I/II	1000/2000 W	750/1500W	750/1500W
Temperature I/II	350/550 °C	300/500 °C	300/500 °C
Air Flow I/II	300/500 l/min	280/480 l/min	280/480 l/min

Packing Type	Color Box	Blow Moulding Case
Carton Size	48.5×28×45cm	57×30×45cm
Qty in Carton	10 PCS	10 PCS
N.W. / G.W.	8.5 / 9.5 KGS	15/16 KGS
Qty in 20GP	5000 PCS	3500 PCS



HOT AIR GUN

GW1002

Voltage & Frequency	230/240V~50Hz	230/240V~50Hz	120V~60Hz
Rate Power I/II	1000/2000 W	750/1500W	750/1500W
Temperature I/II	350/550 °C	300/500 °C	300/500 °C
Air Flow I/II	300/500 l/min	280/480 l/min	280/480 l/min

Packing Type	Color Box	Blow Moulding Case
Carton Size	52×28.5×44cm	56×30×45cm
Qty in Carton	10 PCS	10 PCS
N.W. / G.W.	8.5 / 9.5 KGS	15/16 KGS
Qty in 20GP	4500 PCS	3500 PCS



HOT AIR GUN

GW1003

Voltage & Frequency	230/240V~50Hz	230/240V~50Hz	120V~60Hz
Rate Power I/II	1000/2000 W	750/1500W	750/1500W
Temperature I/II	350/550 °C	300/500 °C	300/500 °C
Air Flow I/II	300/500 l/min	280/480 l/min	280/480 l/min

Packing Type	Color Box	Blow Moulding Case
Carton Size	48×27×41cm	56×30×45cm
Qty in Carton	10 PCS	10PCS
N.W. / G.W.	8/9 KGS	15/16 KGS
Qty in 20GP	5300 PCS	3500 PCS



HOT AIR GUN

GW1004

Voltage & Frequency	230/240V~50Hz	230/240V~50Hz	120V~60Hz
Rate Power I/II	1000/2000 W	750/1500W	750/1500W
Temperature I/II	350/550 °C	300/500 °C	300/500 °C
Air Flow I/II	300/500 l/min	280/480 l/min	280/480 l/min

Packing Type	Color Box	Blow Moulding Case
Carton Size	48×27×41cm	56×30×45cm
Qty in Carton	10PCS	10PCS
N.W. / G.W.	8/9 KGS	15/16KGS
Qty in 20GP	5300 PCS	3500PCS



HOT AIR GUN

GW1005

Voltage & Frequency	230/240V~50Hz	230/240V~50Hz	120V~60Hz
Rate Power I/II	1000/2000 W	750/1500W	750/1500W
Temperature I/II	350/550 °C	300/500 °C	300/500 °C
Air Flow I/II	300/500 l/min	280/480 l/min	280/480 l/min

Packing Type	Color Box	Blow Moulding Case
Carton Size	48.5×28×42cm	56×30×45cm
Qty in Carton	10PCS	10PCS
N.W. / G.W.	8/9KGS	15/16KGS
Qty in 20GP	5000 PCS	3500PCS



HOT AIR GUN

GW1006

Voltage & Frequency	230/240V~50Hz	230/240V~50Hz	120V~60Hz
Rate Power I/II	1000/2000 W	750/1500W	750/1500W
Temperature I/II	350/550 °C	300/500 °C	300/500 °C
Air Flow I/II	300/500 l/min	280/480 l/min	280/480 l/min

Packing Type	Color Box	Blow Moulding Case
Carton Size	49.5×25.2×43.5cm	56×30×45cm
Qty in Carton	10PCS	10PCS
N.W. / G.W.	8.5 / 9.5 KGS	15.5/16.5KGS
Qty in 20GP	5100 PCS	3500 PCS



HOT AIR GUN

GW1007

Voltage & Frequency	230/240V~50Hz	230/240V~50Hz	120V~60Hz
Rate Power I/II	1000/2000W	750/1500W	750/1500W
Temperature I/II	350/550 °C	300/500 °C	300/500 °C
Air Flow I/II	300/500 l/min	280/480 l/min	280/480 l/min

Packing Type	Color Box	Blow Moulding Case
Carton Size	49.5×25.2×43.5cm	56×30×45cm
Qty in Carton	10PCS	10PCS
N.W. / G.W.	8.5/9.5 KGS	15.5/16.5 KGS
Qty in 20GP	5100 PCS	3700PCS



HOT AIR GUN

GW1008

Voltage & Frequency	230/240V~50Hz	230/240V~50Hz	120V~60Hz
Rate Power I/II/III	20/1000/2000 W	20/750/1500W	50/750/1500W
Temperature I/II/III	25/350/550 °C	25/300/500 °C	40/300/500 °C
Air Flow I/II/III	150/300/500 l/min	150/280/480 l/min	280/280/480 l/min

Packing Type	Color Box	Blow Moulding Case
Carton Size	48×29×42cm	56×30×45cm
Qty in Carton	10PCS	10PCS
N.W. / G.W.	8.5 / 9.5 KGS	15.5/16.5KGS
Qty in 20GP	4800 PCS	3500PCS



HOT AIR GUN

GW1009

Voltage & Frequency	230/240V~50Hz	230/240V~50Hz	120V~60Hz
Rate Power I/II	1000/2000 W	750/1500W	750/1500W
Temperature I/II	350/550 °C	300/500 °C	300/500 °C
Air Flow I/II	300/500 l/min	280/480 l/min	280/480 l/min

Packing Type	Color Box	Blow Moulding Case
Carton Size	48.5×28×42cm	56×30×45cm
Qty in Carton	10PCS	10PCS
N.W. / G.W.	8/9KGS	15/16 KGS
Qty in 20GP	5000PCS	3500 PCS



HOT AIR GUN-LCD DISPLAY

GW1010

Voltage & Frequency	230/240V~50Hz	230/240V~50Hz	120V~60Hz
Rate Power	2000W(Max)	1500W(Max)	1500W(Max)
Temperature I/II/III	50/70-600/70-600 °C	50/70-550/70-550 °C	50/70-550/70-550 °C
Air Flow I/II/III	300/300/500l/min	280/280/480l/min	280/280/480 l/min

Packing Type	Color Box	Blow Moulding Case
Carton Size	48.5×28.5×44.5cm	56×30×45cm
Qty in Carton	10PCS	10PCS
N.W. / G.W.	9.5 / 10.5 KGS	16.5/17.5KGS
Qty in 20GP	4600 PCS	3500PCS



HOT AIR GUN-ADJUSTABLE TEMPERATURE

GW1011

Voltage & Frequency	230/240V~50Hz	230/240V~50Hz	100V/120V~60Hz
Rate Power	2000W(Max)	1500W(Max)	1500W(Max)
Temperature I/II/III	50/50-550/50-550 °C	50/50-500/50-500 °C	40/40-350/40-500 °C
Air Flow I/II/III	300/300/500l/min	280/280/480l/min	280/280/480 l/min

Packing Type	Color Box	Blow Moulding Case
Carton Size	48×29×42cm	56×30×45cm
Qty in Carton	10PCS	10PCS
N.W. / G.W.	9.5 / 10.5KGS	16.5/17.5KGS
Qty in 20GP	4800 PCS	3500PCS



HOT AIR GUN

GW1012

Voltage & Frequency	230/240V~50Hz	230/240V~50Hz	120V~60Hz
Rate Power I/II	1000/2000 W	750/1500W	750/1500W
Temperature I/II	350/550 °C	300/500 °C	300/500 °C
Air Flow I/II	300/500 l/min	280/480 l/min	280/480 l/min

Packing Type	Color Box	Blow Moulding Case
Carton Size	52×28×47.5cm	57.5×30×46.5cm
Qty in Carton	10PCS	10PCS
N.W. / G.W.	8.5/9.5 KGS	15.5/16.5KGS
Qty in 20GP	4100 PCS	3500PCS



HOT AIR GUN

GW1013

Voltage & Frequency	230/240V~50Hz	230/240V~50Hz	120V~60Hz
Rate Power I/II	1000/2000 W	750/1500W	750/1500W
Temperature I/II	350/550 °C	300/500 °C	300/500 °C
Air Flow I/II	300/500 l/min	280/480 l/min	280/480 l/min

Packing Type	Color Box	Blow Moulding Case
Carton Size	49.5×28.5×45cm	56×30×45cm
Qty in Carton	10PCS	10PCS
N.W. / G.W.	9/10KGS	16/17KGS
Qty in 20GP	4400PCS	3500PCS



HOT AIR GUN-ADJUSTABLE TEMPERATURE

GW1014

Voltage & Frequency	230/240V~50Hz	230/240V~50Hz	100V/120V~60Hz
Rate Power	2000W(Max)	1500W(Max)	1500W(Max)
Temperature I/II/III	50/50-550/50-550 °C	50/50-500/50-500 °C	40/40-350/40-500 °C
Air Flow I/II/III	300/300/500l/min	280/280/480l/min	280/280/480l/min

Packing Type	Color Box	Blow Moulding Case
Carton Size	49.5×28.5×45cm	56×30×45cm
Qty in Carton	10PCS	10PCS
N.W. / G.W.	9.5 / 10.5 KGS	16.5/17.5 KGS
Qty in 20GP	4400 PCS	3500 PCS



HOT AIR GUN-LCD DISPLAY

GW1015

Voltage & Frequency	230/240V~50Hz	230/240V~50Hz	120V~60Hz
Rate Power	2000W(Max)	1500W(Max)	1500W(Max)
Temperature I/II/III	50/70-600/70-600 °C	50/70-550/70-550 °C	50/70-550/70-550 °C
Air Flow I/II/III	300/300/500l/min	280/280/480l/min	280/280/480l/min

Packing Type	Color Box	Blow Moulding Case
Carton Size	49.5×28.5×45cm	56×30×45cm
Qty in Carton	10PCS	10PCS
N.W. / G.W.	9.8/10.8KGS	16.8/17.8KGS
Qty in 20GP	4400 PCS	3500 PCS



HOT AIR GUN

GW1016

Voltage & Frequency	230/240V~50Hz	230/240V~50Hz	120V~60Hz
Rate Power I/II/III	20/1000/2000W	20/750/1500W	50/750/1500W
Temperature I/II/III	25/350/550 °C	25/300/500 °C	40/300/500 °C
Air Flow I/II/III	150/300/500l/min	150/280/480l/min	280/280/480l/min

Packing Type	Color Box	Blow Moulding Case
Carton Size	49.5×28.5×45cm	56×30×45cm
Qty in Carton	10PCS	10PCS
N.W. / G.W.	9/10KGS	16/17KGS
Qty in 20GP	4400 PCS	3500PCS



HOT AIR GUN

GW1017

Voltage & Frequency	230/240V~50Hz	230/240V~50Hz	120V~60Hz
Rate Power I/II	1000/2000W	750/1500W	750/1500W
Temperature I/II	350/550 °C	300/500 °C	300/500 °C
Air Flow I/II	300/500 l/min	280/480 l/min	280/480 l/min

Packing Type	Color Box	Blow Moulding Case
Carton Size	49.5×25.2×43.5cm	57.5×30×46.5cm
Qty in Carton	10PCS	10PCS
N.W. / G.W.	8/9KGS	15/16KGS
Qty in 20GP	5100 PCS	3500PCS



HOT AIR GUN-LCD DISPLAY

GW1018

Voltage & Frequency	230/240V~50Hz	230/240V~50Hz	120V~60Hz
Rate Power	2000W(Max)	1500W(Max)	1500W(Max)
Temperature I/II/III	50/70-600/70-600 °C	50/70-550/70-550 °C	50/70-550/70-550 °C
Air Flow I/II/III	300/300/500 l/min	280/280/480l/min	280/280/480l/min

Packing Type	Color Box	Blow Moulding Case
Carton Size	52×28×47.5cm	57.5×30×46.5cm
Qty in Carton	10PCS	10PCS
N.W. / G.W.	9.5 / 10.5 KGS	16/17KGS
Qty in 20GP	4100 PCS	3500PCS



HOT AIR GUN-LCD DISPLAY

GW1019

Voltage & Frequency	230/240V~50Hz	230/240V~50Hz	120V~60Hz
Rate Power	2000W(Max)	1500W(Max)	1500W(Max)
Temperature I/II/III	50/70-600/70-600 °C	50/70-550/70-550 °C	50/70-550/70-550 °C
Air Flow I/II/III	300/300/500 l/min	280/280/480l/min	280/280/480l/min

Packing Type	Color Box	Blow Moulding Case
Carton Size	48.5×28.5×45cm	57×30×45cm
Qty in Carton	10PCS	10PCS
N.W. / G.W.	9/10KGS	16/17KGS
Qty in 20GP	4500 PCS	3500 PCS



HOT AIR GUN-LED DISPLAY

GW1020

Voltage & Frequency	230V~50Hz	230V~50Hz	120V~50Hz
Rate Power	2000W(Max)	1500W(Max)	1500W(Max)
Temperature	221-426 °C (LOW SETTING) 298-626 °C (HIGH SETTING)	221-426 °C (LOW SETTING) 298-626 °C (HIGH SETTING)	221-426 °C (LOW SETTING) 298-626 °C (HIGH SETTING)

Packing Type	Color Box	Blow Moulding Case
Carton Size	50×28.5×42cm	56×30×45.5cm
Qty in Carton	10PCS	10PCS
N.W. / G.W.	9/10KGS	16/17KGS
Qty in 20GP	4700 PCS	3500 PCS



HOT AIR GUN-LED DISPLAY

GW1021

Voltage & Frequency	230/240V~50Hz	120V~60Hz
Rate Power	2000W(Max)	1500W(Max)
Temperature I/II/III	50/50-550/50-550 °C	50/50-500/50-500 °C
Air Flow I/II/III	350/350/500 l/min	280/280/480 l/min

Packing Type	Color Box	Blow Moulding Case
Carton Size	49.5×28.5×45cm	56×30×45cm
Qty in Carton	10PCS	10PCS
N.W. / G.W.	9.3/10 KGS	16/17KGS
Qty in 20GP	4400 PCS	3500 PCS



HOT AIR GUN

GW1022

Voltage & Frequency	120V~60Hz	230/240V~50Hz	230V~50Hz
Rate Power I/II	70/1500W	70/1500W	70/2000W
Temperature I/II	50/550 °C	50/550 °C	50/600 °C

Packing Type	Color Box
Carton Size	56.5×33.5×27.7cm
Qty in Carton	4PCS
N.W. / G.W.	8.8/9.5KGS
Qty in 20GP	2060PCS



HOT AIR GUN

GW1023

Voltage & Frequency	230/240V~50Hz	120V~60Hz
Rate Power I/II	1000/2000W	750/1500W
Temperature I/II	350/550 °C	300/500 °C
Air Flow I/II	300/500 l/min	280/480 l/min

Packing Type	Color Box
Carton Size	40×32.5×47cm
Qty in Carton	10PCS
N.W. / G.W.	8.2/9KGS
Qty in 20GP	4410PCS



HOT AIR GUN-LED DISPLAY

GW1024

Voltage & Frequency	230/240V~50Hz	120V~60Hz
Rate Power	2000W(MAX)	1500W(MAX)
Temperature I/II	I: 50~550°C II: 100~600°C	I: 50~500°C II: 70~550°C
Air Flow I/II	300/500 l/min	280/480 l/min

Packing Type	Color Box	Blow Moulding Case
Carton Size	52×28×47.5cm	59.5×33×49.5cm
Qty in Carton	10PCS	10PCS
N.W. / G.W.	9/10KGS	18/19KGS
Qty in 20GP	4100PCS	2780PCS



HOT AIR GUN

GW1025

Voltage & Frequency	230/240V~50Hz	230/240V~50Hz	120V~50Hz
Rate Power I/II	1000/2000 W	750/1500W	750/1500W
Temperature I/II	350/550 °C	300/500 °C	300/500 °C
Air Flow I/II	300/500 l/min	280/480 l/min	280/480 l/min

Packing Type	Color Box	Blow Moulding Case
Carton Size	52×28×47.5cm	59.5×33×49.5cm
Qty in Carton	10PCS	10PCS
N.W. / G.W.	8.3/9.2KGS	17/18KGS
Qty in 20GP	4100PCS	2780PCS



HOT AIR GUN

GW1026

Voltage & Frequency	230/240V~50Hz	230/240V~50Hz	120V~60Hz
Rate Power I/II	1000/2000 W	750/1500W	750/1500W
Temperature I/II	350/550 °C	300/500 °C	300/500 °C
Air Flow I/II	300/500 l/min	280/480 l/min	280/480 l/min

Packing Type	Color Box	Blow Moulding Case
Carton Size	52×28×47.5cm	59.5×33×49.5cm
Qty in Carton	10PCS	10PCS
N.W. / G.W.	9.5/10.5KGS	18/19KGS
Qty in 20GP	4100PCS	2780PCS



HOT AIR GUN-ADJUSTABLE TEMPERATURE

GW1027

Voltage & Frequency	230/240V~50Hz	230/240V~50Hz	100V/120V~60Hz
Rate Power	2000W(Max)	150W(Max)	1500W(Max)
Temperature I/II/III	50/50-550/50-550 °C	50/50-500/50-500 °C	40/40-350/40-500 °C
Air Flow I/II/III	350/350/500 l/min	280/280/480 l/min	280/280/480 l/min

Packing Type	Color Box	Blow Moulding Case
Carton Size	52×28×47.5cm	59.5×33×49.5cm
Qty in Carton	10PCS	10PCS
N.W. / G.W.	9.5/10.5KGS	18/19KGS
Qty in 20GP	4100PCS	2780PCS



HOT AIR GUN-LCD DISPLAY

GW1028

Voltage & Frequency	230/240V~50Hz	230/240V~50Hz	120V~60Hz
Rate Power	2000W(Max)	1500W(Max)	1500W(Max)
Temperature I/II/III	50/70-600/70-600 °C	50/70-550/70-550 °C	50/70-550/70-550 °C
Air Flow I/II/III	300/300/500 l/min	280/280/480 l/min	280/280/480 l/min

Packing Type	Color Box	Blow Moulding Case
Carton Size	52×28×47.5cm	59.5×33×49.5cm
Qty in Carton	10PCS	10PCS
N.W. / G.W.	9.5/10.5KGS	18/19KGS
Qty in 20GP	4100PCS	2780PCS



HOT AIR GUN-LCD DISPLAY

GW1028-5

Voltage & Frequency	230/240V~50Hz	120V~60Hz
Rate Power	2000W(Max)	1500W(Max)
Temperature I/II	50/70-600°C	50/70-550°C
Air Flow I/II	200/500 l/min	280/480 l/min

Packing Type	Color Box	Blow Moulding Case
Carton Size	52×28×47.5cm	59.5×33×49.5cm
Qty in Carton	10PCS	10PCS
N.W. / G.W.	9.5/10.5KGS	18/19KGS
Qty in 20GP	4100PCS	2780PCS



HOT AIR GUN-LED DISPLAY

GW1029

Voltage & Frequency	230/240V~50Hz	120V~60Hz
Rate Power	2000W(MAX)	1500W(MAX)
Temperature I/II	I: 50-550°C II: 100-600°C	I: 50-500°C II: 70-550°C
Air Flow I/II	300/500 l/min	280/480 l/min

Packing Type	Color Box	Blow Moulding Case
Carton Size	52×28×47.5cm	59.5×33×49.5cm
Qty in Carton	10PCS	10PCS
N.W. / G.W.	9.5/10.5KGS	18/19KGS
Qty in 20GP	4100PCS	2780PCS



MINI HEAT GUN





GW1031

Voltage & Frequency	230/240V~50Hz	120V~60Hz
Rate Power	350W	350W
Temperature	350°C	350°C
Air Flow	280 l/min	280 l/min

Packing Type	Color Box	Color Box
Carton Size	36×30×27.5cm	36×30×27.5cm
Qty in Carton	20PCS	20PCS
N.W. / G.W.	7/7.5KGS	7/7.5KGS
Qty in 20GP	18180PCS	18180PCS



HOT AIR GUN ACCESSORIES

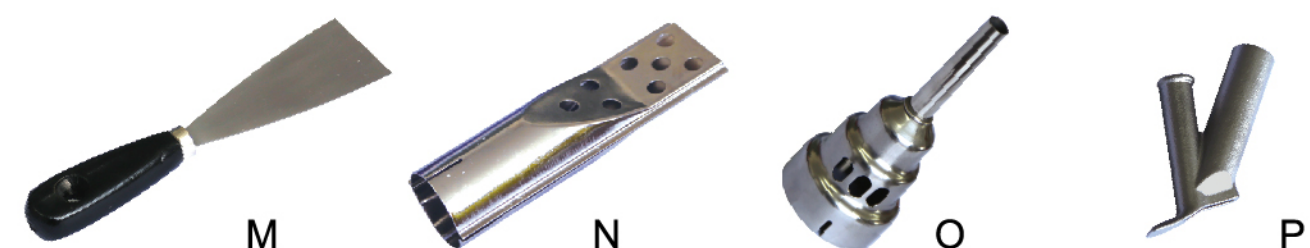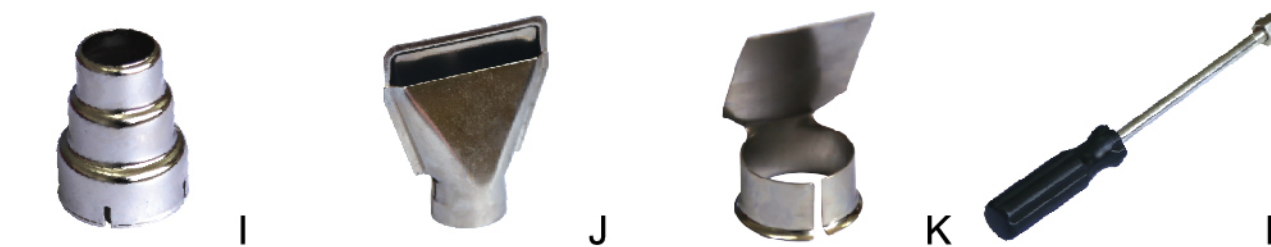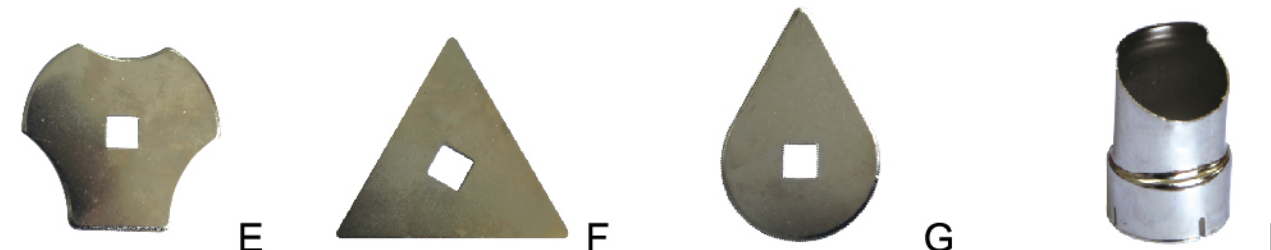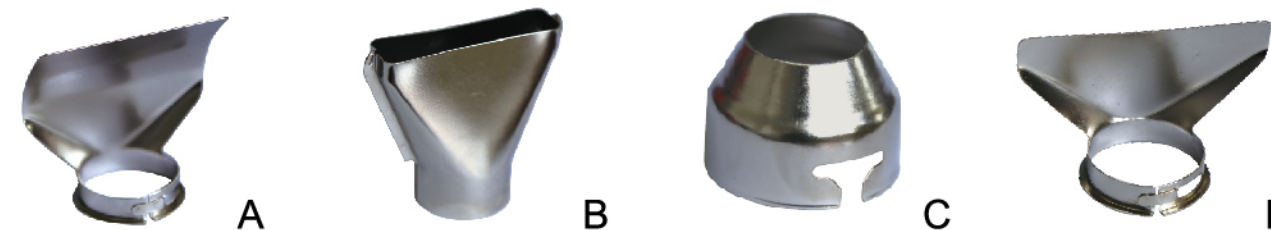

HOT AIR GUN PACKING



COLOR BOX



BLOW MOULDING CASE